

304 Series™

Canopy Luminaire – Mounting R - Recessed Mount for canopy - TM (Type II Medium)

Product Description

The Cree 304 Series version with recessed mounting system is a fixture designed to optimize the use of LED technology for lighting petrol station forecourt canopies. Luminaire is constructed from rugged die-cast and extruded aluminum components. LED driver is mounted in a sealed weathertight center chamber that allows for access from below the luminaire.

High performance heatsinks specifically designed for LED canopy application. Luminaire mounts directly to the canopy deck and is secured in place with diecast aluminum trim frame. Luminaire housing is provided with factory applied foam gasket and provides for a watertight seal between luminaire housing and canopy deck. In general, the 304 Series is the ideal solution for recessed mounting in metal suspended ceilings with a maximum thickness of 1 mm. A retrofit kit is available for 1 to 38 mm thickness and for any kind of ceiling.

Performance Summary

Utilizes BetaLED® Technology

Patented NanoOptic® Product Technology

CRI: Minimum 70 CRI

CCT: 5700K (+/- 500K) Standard, 4000K (+/- 300K)



Limited Warranty†:

10 years on luminaire / 10 years on Colorfast DeltaGuard® finish

Accessories

Field Installed Accessories

RTF-RCS-A1-304##
- Retrofit kit

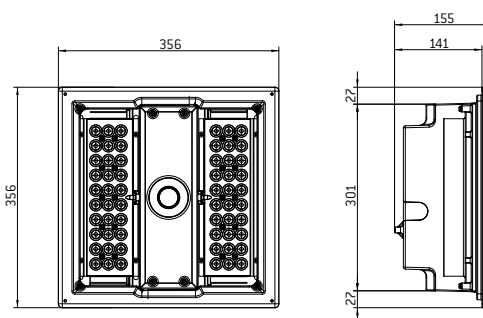

Ordering Information

Example: 30XTMR04E43DWHI5

30	X	TM	R	04	E	43	WH	I5
Product	Insulation Class	Optic	Mounting	LED count x 10	GEN	Options	Color Options	Drive Current
30	x Class 1	TM Type II Medium	R Recessed mount	04 06	E	no code 5700K 43 4000K Color Temperature - Color temperature per luminaire D 1-10V Dimming - Control by others - Refer to dimming spec sheet for availability and additional information - Can't exceed specified drive current K# Light Control with Occupancy Sensor - Flux dimming control with occupancy sensor E Light Control with Occupancy Sensor with remote control - Flux dimming control with occupancy sensor with remote control N# Reprogrammable Virtual Midnight - Reprogrammable 2 levels option with virtual midnight	WH White (Standard) SV Silver BK Black BZ Bronze SB Silver Bronze	no code 700mA I5 525 mA I3 350 mA

† See www.cree-europe.com for warranty terms



Rev. Date: 11 April 2014



www.cree-europe.com

Ph. +39 055 343081 Fax +39 055 34308200

Canopy Luminaire – Mounting R - Recessed Mount for canopy - TM (Type II Medium)

Product Specifications

CONSTRUCTION & MATERIALS

- Luminaire is constructed from rugged die cast and extruded aluminum components. LED driver is mounted in a sealed weathertight center chamber that allows for access from below
- High performance heat sinks specifically designed for LED canopy application
- Luminaire mounts directly to the canopy deck and is secured in place with die-cast aluminum trim frame
- Luminaire housing is provided with factory applied foam gasket and provides for a watertight seal between luminaire housing and canopy deck
- Suitable for use in single and double skin canopies
- Designed for canopies of maximum 1mm thickness
- Exclusive Colorfast DeltaGuard® finish features an E-Coat epoxy primer with an ultra-durable powder topcoat, providing excellent resistance to corrosion, ultraviolet degradation and abrasion. Available colours are White, Silver, Silver Bronze, Bronze and Black

ELECTRICAL SYSTEM


- Input Voltage:** 220-240V, 50/60Hz
- Power Factor:** > 0.9 at full load
- Total Harmonic Distortion:** < 20% at full load
- Integral 10kV surge suppression protection standard
- To address inrush current, slow blow fuse or type C / D breaker should be used

REGULATORY & VOLUNTARY QUALIFICATIONS


- CE / ENEC Listed
- Enclosure rated IP66 per IEC 60529
- 10kV surge suppression protection tested in accordance with IEEE /ANSI C62.41.2
- Luminaire and finish endurance tested to withstand 5,000 hours of elevated ambient salt fog conditions as defined in ASTM Standard B 117
- RoHS Compliant

Photometry

All published luminaire photometric testing performed to IESNA LM-79-08 standards by a NVLAP certified laboratory.

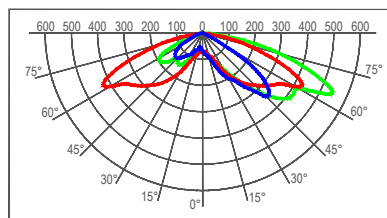

cd/klm
 — C0 - C180 — C90 - C270 — C15 - C195



lux

Test Report #: CESTL-2013-0025

30XTMR04E43
 Mounting Height: 6m
 Initial Delivered Lumens: 7137

IES Files

To obtain an IES file specific to your project, please consult www.cree-europe.com

Weight

LED Count (x10)	Weight
04	7,40 Kg
06	

Lumen Output, Electrical, and Lumen Maintenance Data

Effective Flux (lm) - TM (Type II Medium) Distribution						
LED Count (x10)	5700K	4000K	System Watts 220-240V	Total Current (A)	50K Hours Projected Lumen Maintenance Factor @ 15° C (59° F)	L ₇₀ Life* (hours)
	Delivered Lumens	Delivered Lumens		230V		
350mA @ 25° C (77° F)					94%	>150000
04	4031	3911	46	0.21		
06	6047	5866	66	0.31		
525mA @ 25° C (77° F)					93%	149000
04	5805	5632	70	0.30		
06	8708	8448	99	0.45		
700mA @ 25° C (77° F)					91%	129000
04	7357	7137	91	0.40		
06	11036	10706	132	0.60		

* Based on fixture operating at 25° C